

## ANCHOR CAPSTAN GMP

Electric anchor capstan for the vertical installation below the deck.


Driven mode: electric

Location: vertically below the deck

Anchor chain diameter: 12,5 – 52 mm

Voltage: 220 and 380 V

The anchor capstan could be customized by request.

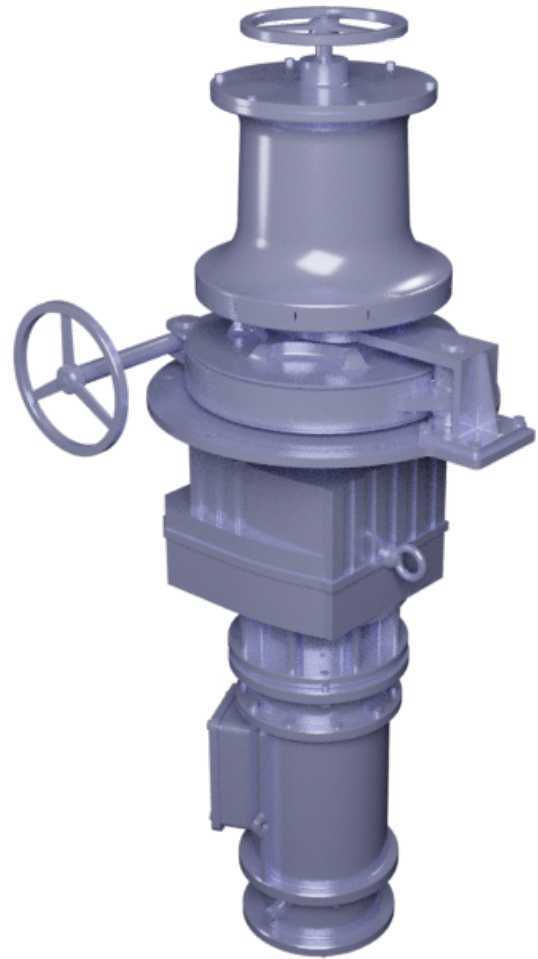

	Nº	Model	Driven mode	Anchor chain diameter, mm	Speed of the anchor chain drop, m/sec	Speed of the mooring line drop, m/sec	Working load, kN	Braking moment of the brake band, kN	Power, kw
	1	GMP-12,5	Electric driven motor 220V or 380V, 50Hz	12,5	0,19 / 0,063	0,14	6,64	19,80	3 / 1.2
	2	GMP-14		14	0,22 / 0,073	0,26	8,33	24,60	3 / 1.2
	3	GMP-16		16	0,2 / 0,067	0,25	10,88	32,10	4,3 / 1,7
	4	GMP-17,5		17,5	0,15 / 0,05	0,27	13,02	38,10	4,3 / 1,7
	5	GMP-19		19	0,2 / 0,067	0,27	15,34	50,00	6 / 2,5
	6	GMP-20,5		20,5	0,2 / 0,067	0,27	17,96	52,50	6 / 2,5
	7	GMP-22		22	0,19 / 0,063	0,25	20,57	60,00	6 / 2,5
	8	GMP-24		24	0,15 / 0,075	0,25	24,50	71,10	8,5 / 3,5
	9	GMP-26		26	0,15 / 0,075	0,20	28,70	83,40	8,5 / 3,5
	10	GMP-28		28	0,3 / 0,15 / 0,05	0,21	33,32	96,30	11 / 11 / 7,5
	11	GMP-30		30	0,3 / 0,15 / 0,05	0,21	38,25	110,40	11 / 11 / 7,5
	12	GMP-32		32	0,3 / 0,15 / 0,05	0,23	43,52	125,10	16 / 16 / 11
	13	GMP-34		34	0,33 / 0,167 / 0,084	0,23	49,13	140,40	16 / 16 / 11
	14	GMP-36		36	0,33 / 0,167 / 0,084	0,23	55,08	156,90	22 / 22 / 16
	15	GMP-38		38	0,33 / 0,167 / 0,084	0,23	61,40	174,30	22 / 22 / 16

Dimensions for the higher anchor chain diameters available by request: [order@umsteam.com](mailto:order@umsteam.com)