


## ANCHOR-MOORING WINCH TYPE AWC-E

The winch AWC-E could be customized for the power, working load, anchor chain grade, warping head, remote anchor drop, starboard/port and other parameters under request.

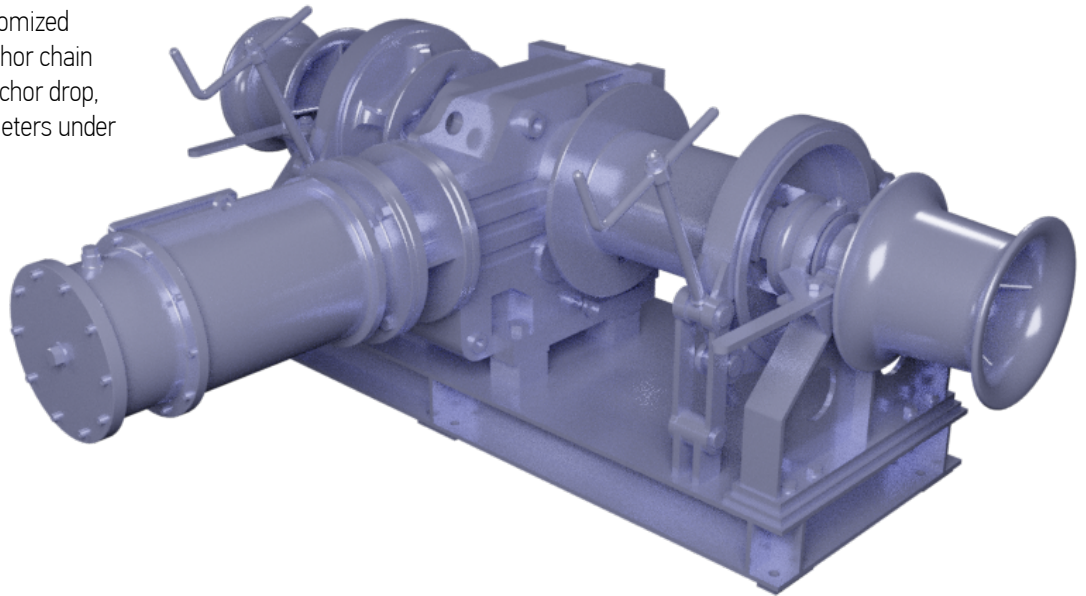

Nº	Model	Driven mode	Anchor chain diameter, mm	Anchor chain grade	Working load for the chain wheel, kN	Speed of the anchor chain drop, m/min	Working load for the mooring drum, kN	Diameter for the mooring steel cable, m	Power, kw
1	AWC-19E / -20,5E / -22E	Electric driven motor 220V or 380V, 50Hz	19 / 20,5 / 22	2 3	15,3 / 17,9 / 20,6 17,1 / 20 / 23	≥ 9	≤ 15	18	4,3 / 1,7
2	AWC-24E / -26E		24 / 26	2 3	24,5 / 28,7 27,4 / 32,1	≥ 9	≤ 20	20	6 / 2,5
3	AWC-28E / -30E		28 / 30	2 3	33,3 / 38,3 37,2 / 42,8	≥ 9	≤ 25	24	7,5 / 7,5 / 5
4	AWC-32E / -34E / -36E		32 / 34 / 36	2 3	43,5 / 49,1 / 55,1 48,6 / 54,9 / 61,6	≥ 9	≤ 35	32	11 / 11 / 7,5
5	AWC-38E / -40E / -42E		38 / 40 / 42	2 3	61,4 / 68 / 75 68,6 / 76 / 83,8	≥ 9	≤ 50	36	16 / 16 / 11
6	AWC-44E / -46E		44 / 46	2 3	82,3 / 90 92 / 100,5	≥ 9	≤ 75	40	22 / 22 / 16
7	AWC-48E / -50E / -52E		48 / 50 / 52	2 3	98 / 106,3 / 115 109,4 / 118,8 / 128,4	≥ 9	≤ 75	48	22 / 22 / 16
8	AWC-54E / -56E		54 / 56	2 3	124 / 133,3 138,5 / 149	≥ 9	≤ 100	48	30 / 30 / 22
9	AWC-58E / -60E		58 / 60	2 3	143 / 153 159,8 / 171	≥ 9	≤ 100	60	30 / 30 / 22
10	AWC-62E / -64E		62 / 64	2 3	163,4 / 174,1 182,6 / 194,6	≥ 9	≤ 150	60	45 / 45 / 30