


ELECTRIC ANCHOR WINDLASS TYPE GMB-N

Anchor windlass of «GMB-N» type doesn't have the remote anchor drop.

- Anchor chain grade: 12,5-81 mm

The windlass of this type could be customized for power, working load, anchor chain grade, warping head, and other parameters under request.

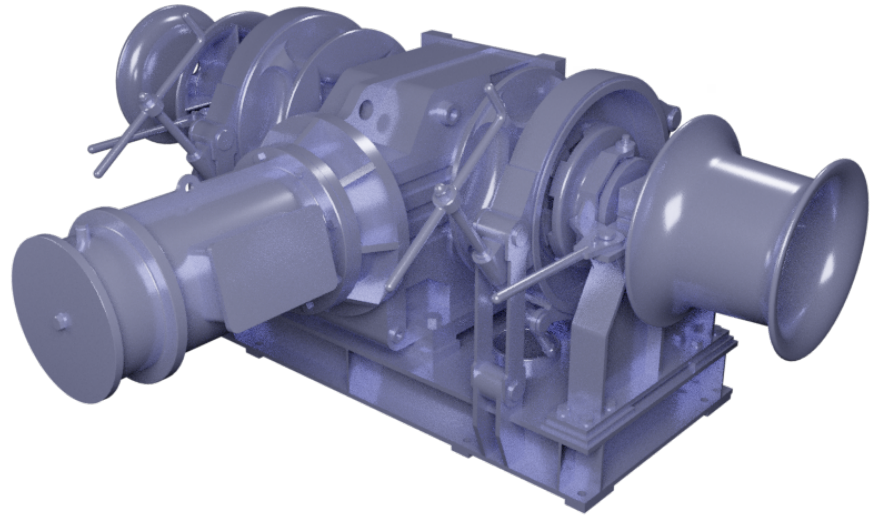

Nº	Model	Driven mode	Anchor chain diameter, mm	Speed of the anchor chain drop, m/sec	Speed of the mooring line drop, m/sec	Nominal pull, kN	Working load, kN	Braking moment of the brake band, kN	Power, kw
1	GMB-12,5N	Electric driven motor 220V or 380V, 50Hz	12,5	0,19 / 0,063	0,14	3,53	6,64	19,80	3 / 1,2
2	GMB-14N		14	0,22 / 0,073	0,26	4,43	8,33	24,60	3 / 1,2
3	GMB-16N		16	0,2 / 0,067	0,25	5,79	10,88	32,10	4,3 / 1,7
4	GMB-17,5N		17,5	0,15 / 0,05	0,27	6,92	13,02	38,10	4,3 / 1,7
5	GMB-19N		19	0,2 / 0,067	0,27	8,16	15,34	50,00	6 / 2,5
6	GMB-20,5N		20,5	0,2 / 0,067	0,27	9,50	17,96	52,50	6 / 2,5
7	GMB-22N		22	0,19 / 0,063	0,25	10,94	20,57	60,00	6 / 2,5
8	GMB-24N		24	0,15 / 0,075	0,25	13,02	24,50	71,10	8,5 / 3,5
9	GMB-26N		26	0,15 / 0,075	0,20	15,28	28,70	83,40	8,5 / 3,5
10	GMB-28N		28	0,3 / 0,15 / 0,05	0,21	17,72	33,32	96,30	8,5 / 3,5
11	GMB-30N		30	0,3 / 0,15 / 0,05	0,21	20,34	38,25	110,40	11 / 11 / 7,5
12	GMB-32N		32	0,3 / 0,15 / 0,05	0,23	23,14	43,52	125,10	11 / 11 / 7,5
13	GMB-34N		34	0,33 / 0,167 / 0,084	0,23	26,13	49,13	140,40	11 / 11 / 7,5
14	GMB-36N		36	0,33 / 0,167 / 0,084	0,23	29,29	55,08	156,90	16 / 16 / 11
15	GMB-38N		38	0,33 / 0,167 / 0,084	0,23	32,63	61,40	174,30	16 / 16 / 11
16	GMB-40N		40	0,42 / 0,20 / 0,09	0,25	36,16	68,00	192,00	22 / 22 / 16
17	GMB-42N		42	0,42 / 0,20 / 0,09	0,28	39,87	74,97	210,90	22 / 22 / 16
18	GMB-44N		44	0,42 / 0,20 / 0,09	0,28	43,75	82,28	230,70	22 / 22 / 16
19	GMB-46N		46	0,42 / 0,20 / 0,09	0,30	47,82	89,93	251,10	30 / 30 / 22
20	GMB-48N		48	0,34 / 0,16 / 0,08	0,30	52,07	97,92	272,40	30 / 30 / 22
21	GMB-50N		50	0,34 / 0,16 / 0,08	0,30	56,50	106,25	294,30	30 / 30 / 22
22	GMB-52N		52	0,34 / 0,16 / 0,08	0,30	61,11	114,92	318,00	30 / 30 / 22

Dimensions for the higher anchor chain diameters available by request: order@umsteam.com